

Miniature High Power Relay

CT

Features

- 40A switching capability
- 4kV dielectric strength
(between coil and contacts)
- Heavy load up to 7200VA
- PCB coil terminal, ideal for duty load
- Plastic sealed type



UL
(File No.:E134581)

1. COIL DATA (at 23°C)

1) DC Type

Nominal Voltage (VDC)	Pick-up Voltage (VDC)	Drop-out Voltage (VDC)	Max Allowable Voltage (VDC)	Coil Current (mA)(±10%)	Coil Resistance (Ω)	Coil Power (mW)
5	3.75	0.5	6.50	180	27 x (1±10%)	Approx. 900
6	4.50	0.6	7.80	150	40 x (1±10%)	
9	6.75	0.9	11.7	100	97 x (1±10%)	
12	9.00	1.2	15.6	75.0	155 x (1±10%)	
15	11.25	1.5	19.5	60.0	256 x (1±10%)	
18	13.50	1.8	23.4	50.0	380 x (1±10%)	
24	18.00	2.4	31.2	37.5	660 x (1±10%)	
48	36.00	4.8	62.4	18.8	2560 x (1±10%)	
70	52.50	7.0	91.0	12.9	5500 x (1±10%)	
110	82.50	11	143	8.18	13450 x (1±10%)	

2) AC Type

Nominal Voltage (VAC)	Pick-up Voltage (VAC)	Drop-out Voltage (VAC)	Max Allowable Voltage (VAC)	Coil Current (mA)(±10%)	Coil Resistance (Ω)	Coil Power (VA)
12	9.60	2.4	15.6	167	25 x (1±10%)	Approx. 2
24	19.2	4.8	31.2	83.3	100 x (1±10%)	
120	96.0	24	156.0	16.7	2500 x (1±10%)	
208	166.4	41	270.4	9.62	11000 x (1±10%)	
220	176	44	286.0	9.10	13490 x (1±10%)	
240	192	48	286.0	8.30	13490 x (1±10%)	
277	220	54	360.1	7.22	15000 x (1±10%)	

Note: 1) When requiring pick-up voltage <80% of nominal voltage, special order allowed.

2) The data shown above are initial values at 50Hz. When requiring 60Hz, special order allowed.

3) The data shown above are initial values.

4) The maximum allowable voltage refers to the maximum voltage which relay coil could endure in a short period of time.

2. CONTACT DATA

Contact Arrangement		1 Form A	1 Form C	
			NO	NC
Contact Resistance ¹⁾		50mΩ max. (at 1A 24VDC)		
Contact Material		AgSnO ₂		
Max. Switching Voltage		277VAC / 28VDC		
Max. Switching Current		40A ²⁾	20A	10A
Max. Switching Power		11080VA / 1200W	5540VA / 600W	2770VA / 300W
Contact rating		30A 240VAC 20A 28VDC	20A 240VAC 20A 28VDC	10A 240VAC 10A 28VDC
Life Expectancy	Electrical	100,000 operations		
	Mechanical	10,000,000 operations		

Note: 1) The data shown above are initial values.

2) Long time current –carrying under 40A condition is prohibited.

3. CHARACTERISTICS

Insulation Resistance		1000MΩ (at 500VDC)	
Dielectric Strength	Open Contacts	1500VAC 1min	
	Coil and Contacts	2500VAC / 4000VAC 1min	
Operate Time (at nominal voltage)		DC type	15ms max.
Release Time (at nominal voltage)		DC type	10ms max.
Temperature Range		DC type	-55℃ ~ 85℃
		AC type	-55℃ ~ 60℃
Shock Resistance	Functional		98m/s ²
	Destructive		980m/s ²
Vibration Resistance			10 ~ 55Hz, 1.5mm DA
Humidity			5 ~ 85% RH
Termination			PCB
Construction			Plastic sealed type
Weight			Approx. 36g
Outline Dimension (L x W x H)			32.3 x 27.1 x 20.0mm

Note: 1) For plastic sealed type, the venting-hole should be opened in test.

2) The data shown above are initial values.

3) Please find coil temperature curve in the characteristic curves below.

4) UL insulation system: Class F, Class B

4. ORDERING INFORMATION

<u>CT</u> ①	<u>11</u> ②	<u>B</u> ③	-	<u>D12</u> ④	<u>S</u> ⑤	<u>F</u> ⑥
① Relay Model	CT					
② Contact Arrangement	11: 1 Form A (SPST-NO) 1: 1 Form C (SPDT)					
③ Termination	Nil: With Pin NO. 6, Dielectric strength Between Coil and Contact: 2500VAC B: Without Pin NO. 6, Dielectric strength Between Coil and Contact: 4000VAC N: Without Pin NO. 6, Dielectric strength Between Coil and Contact: 2500VAC					
④ Coil Voltage	DC: D5=5VDC, D6=6VDC, D9=9VDC, D12=12VDC, D15=15VDC, D18=18VDC, D24=24VDC, D48=48VDC, D70=70VDC, D110=110VDC AC: A12=12VAC, A24=24VAC, A120=120VAC, A208=208VAC, A220=220VAC, A240=240VAC, A277=277VAC					
⑤ Construction	S: Sealed type					
⑥ Insulation Standard	Nil: Class B F: Class F					

5. SAFETY APPROVAL RATINGS

UL/cUL	1 Form A		30A 277VAC 40A 277VAC 2HP 250VAC 1HP 125VAC
	1 Form C	NO	30A 277VAC 2HP 250VAC 1HP 125VAC
		NC	20A 277VAC 1/2HP 250VAC 1/4HP 125VAC


Notes:

1) All values unspecified are at room temperature.


2) Only typical loads are listed above. Other load specifications can be available upon request.

6. DIMENSIONS (Unit: mm)

Outline Dimensions

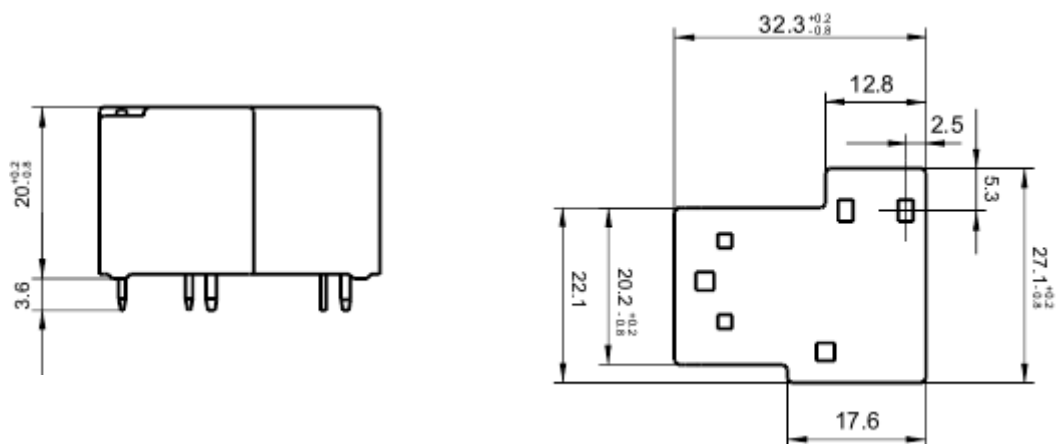


PCB Layout (Bottom View)

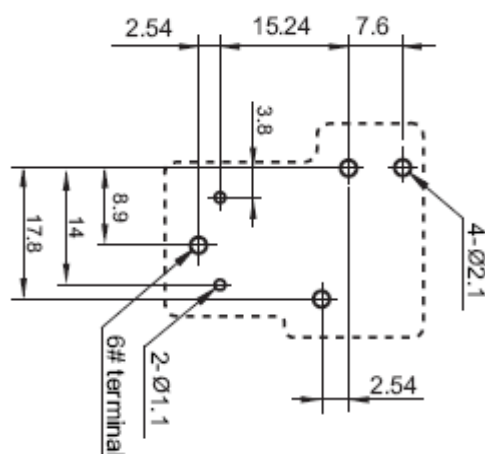

Wiring Diagram (Bottom View)


Sealed type with 6# terminal

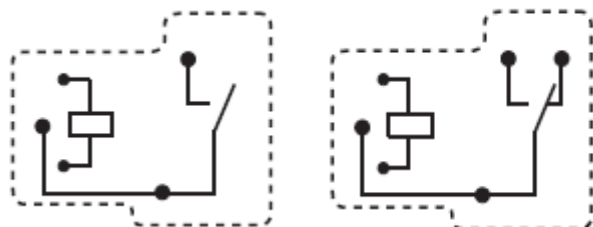

1 Form A

1 Form C

Sealed without 6# terminal

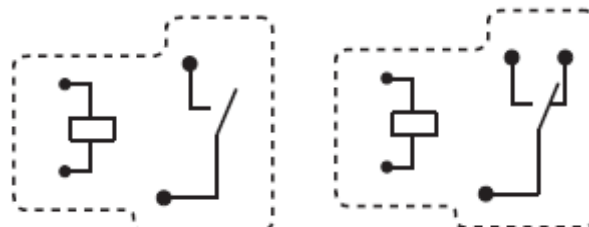

1 Form A


1 Form C

Remark: 1) In case of no tolerance shown in outline dimension: outline dimension ≤ 1 mm, tolerance should be ± 0.2 mm; outline dimension > 1 mm and ≤ 5 mm, tolerance should be ± 0.3 mm; outline dimension > 5 mm, tolerance should be ± 0.4 mm.


2) The tolerance without indicating for PCB layout is always ± 0.1 mm

6. CHARACTERISTIC CURVES

Maximum Switching Power

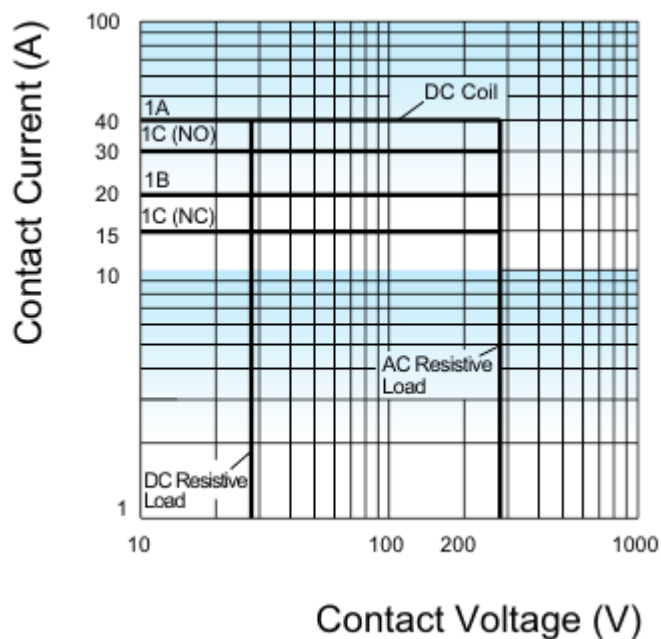

Endurance Curve

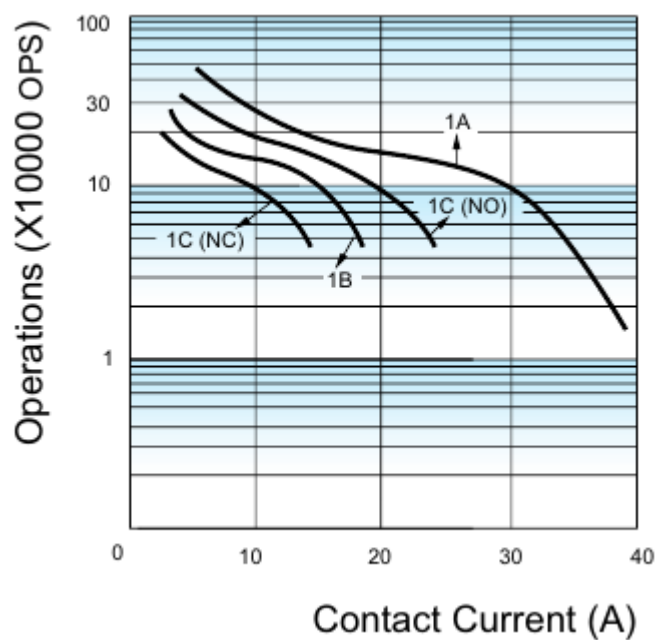

Coil Temperature Rise

